

# VoIP Phone

SAX-8206-P / SAX-8106-P

QIG v1.1



# 1 Over view

This Phone is a full-feature telephone that provides voice communication. Read this QIG carefully to learn how to operate this product and take advantage of its features.

## Package Contents

When unpacking the phone, ensure all the following items are present and undamaged. If anything appears to be missing or broken, contact your dealer for a replacement.

1. Base Unit
2. RJ-45 Cable
3. Quick Installation Guide(This document)

## 2 Product Description

The following contains important information to help you familiarize with the functions of the phone.

### Front View



	Name	Description
1	Ring Indicator	A red light indicator means that you have incoming calls.
2	Dialing Pad	Press the buttons to dial a phone number or enter alphabetical characters.
3	LINE 1 / LINE 2	There are two LINEs bottom in this handset.
4	End key	Press to finish the call
5	Function keys	
	Hold	Press to put an active call on hold.
	Mute	Press to mute a call.
	Volume	Press to increase or decrease the volume of the ringer tone.


## Back View



NO.	Name	Description
1	LAN port	Connects to HUB, ADSL, or Switch(PSE)

## 3. Installation

The following illustration shows how to install the phone on the wall.

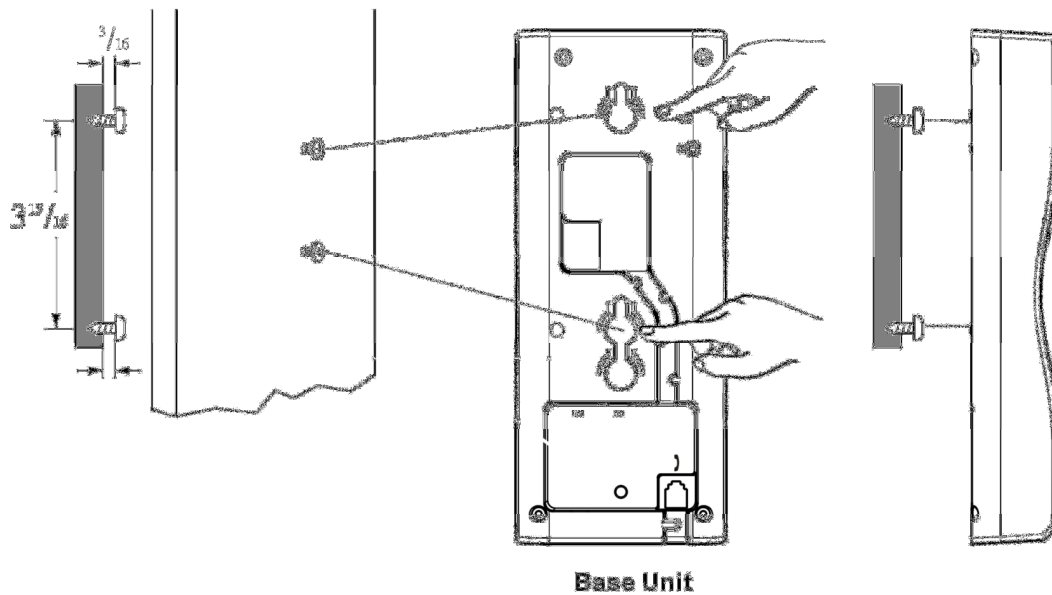

## 4 Operation

### Pairing with master unit

Please follow the step below to pair the SAX phone set with the master unit.

- Please enter “\* 112 \*811” on master unit to standby.
- Press the star key to enter the SAX menu; close the item 2 to start the pairing.
- Press the line key to submit the pair.

### Answering a Call

---

An incoming call is indicated by a ringing tone and a flashing indicator at the top of both handset and base units. You can answer the call by doing one of the followings:

- Pick up the **handset** to answer the call.

## Making a Call

### Dialing with the Keypad

- Enter the telephone number with the alphanumerical keypad.
- After entering the number you want to call, press the # key to force dialing or wait for 3 seconds before the number is dialed automatically.

## Call Options

While a call is in progress, a number of additional options are available.

## Putting a Call on Hold

You may want to put a call on hold temporarily while doing some work or attending to a second incoming or outgoing call. To put a call on hold, do one of the following:

- Press the **HOLD** key on the phone to put the call on hold.
- When you receive a second call, press the next available **LINE** key to attend to the new call, and the first call will be put on hold automatically.

## Checking Voice Messages

If the **message waiting indicator** at top of handset or base unit lights up in red, it indicates that there are one or more new messages in voicemail box.

- Press the **MESSAGE** key on the phone to retrieve voice messages.

(An external ITSP or PBX must support voice message feature. And you need to set a voice message code before using the voice mail feature.)

# 5 Support

To configure through the web browser, do the following:

- Ensure the phone is powered up and connected to a DCHP network.
  - Pick up the handset and then press \*112\*113#, the IP address is announced by the phone.
  - Open your browser (such as Chrome, Firefox, etc.) and type in the web address of the phone. For example, `http://IP.address.of.thePhone:8000`
  - When the Web login front page is displayed. Enter the user name and the password and click **Login**. The administrator's user name and password are "**admin**" and "**1234**" respectively.
-

## 6 Battery Safety Instructions

- CAUTION: Use only supplied battery.
- Do not dispose of the battery in a fire. Check with local waste management codes for special disposal instructions.
- Do not open or mutilate the battery. Released electrolyte is corrosive and cause burn or injury to the eyes or skin. The electrolyte may be toxic if swallowed.
- Exercise care in handling batteries in order not to create a short circuit with conductive materials.
- Charge the battery provided with or identified for use with this product only in accordance with the instructions and limitations specified in this guide.

## 7 Important Information

- Only use the battery provided by AEI, may be a risk of explosion if wrong type of battery is used.
- Use only the power adapter supplied with this product.
- If you do not use the handset for a long time, disconnect and remove the battery to prevent possible leakage.
- You may place the handset into the base after each call in order to charge the battery.
- For technical support, please email to [support@aeicomunications.com.tw](mailto:support@aeicomunications.com.tw)

Model:

SAX-8206-P / SAX-8106-P

---