

VoIP Phone

SAX-8206-P / SAX-8106-P

QIG v1.0



1 Over view

This Phone is a full-feature telephone that provides voice communication. Read this QIG carefully to learn how to operate this product and take advantage of its features.

Package Contents

When unpacking the phone, ensure all the following items are present and undamaged. If anything appears to be missing or broken, contact your dealer for a replacement.

1. Base Unit
2. RJ-45 Cable
3. Quick Installation Guide(This document)

2 Product Description

The following contains important information to help you familiarize with the functions of the phone.

Front View



	Name	Description
1	Ring Indicator	A red light indicator means that you have incoming calls.
2	Dialing Pad	Press the buttons to dial a phone number or enter alphabetical characters.
3	LINE 1 / LINE 2	There are two LINEs bottom in this handset.
4	End key	Press to finish the call
5	Function keys	
	Hold	Press to put an active call on hold.
	Mute	Press to mute a call.
	Volume	Press to increase or decrease the volume of the ringer tone.


Back View



NO.	Name	Description
1	LAN port	Connects to HUB, ADSL, or Switch(PSE)

3. Installation

The following illustration shows how to install the phone on the wall.

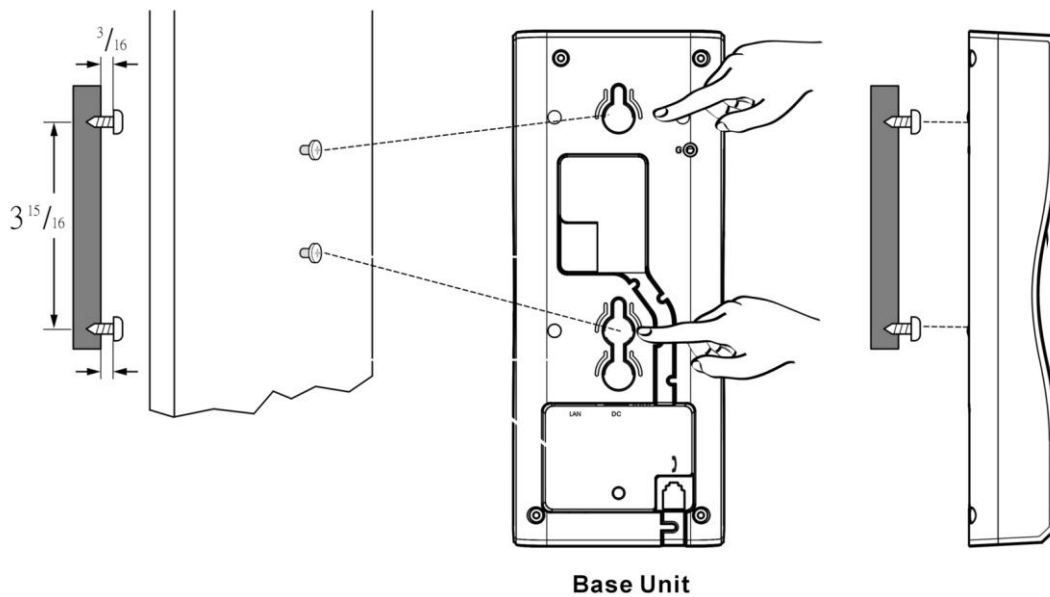

4 Operation

Pairing with master unit

Please follow the step below to pair the SAX phone set with the master unit.

- Please enter “* 112 *811” on master unit to standby.
- Press the star key to enter the SAX menu; close the item 2 to start the pairing.
- Press the line key to submit the pair.

Answering a Call

An incoming call is indicated by a ringing tone and a flashing indicator at the top of both handset and base units. You can answer the call by doing one of the followings:

- Pick up the **handset** to answer the call.

Making a Call

Dialing with the Keypad

- Enter the telephone number with the alphanumeric keypad.
- After entering the number you want to call, press the # key to force dialing or wait for 3 seconds before the number is dialed automatically.

Call Options

While a call is in progress, a number of additional options are available.

Putting a Call on Hold

You may want to put a call on hold temporarily while doing some work or attending to a second incoming or outgoing call. To put a call on hold, do one of the following:

- Press the **HOLD** key on the phone to put the call on hold.
- When you receive a second call, press the next available **LINE** key to attend to the new call, and the first call will be put on hold automatically.

Checking Voice Messages

If the **message waiting indicator** at top of handset or base unit lights up in red, it indicates that there are one or more new messages in voicemail box.

- Press the **MESSAGE** key on the phone to retrieve voice messages.

(An external ITSP or PBX must support voice message feature. And you need to set a voice message code before using the voice mail feature.)

5 Support

To configure through the web browser, do the following:

- Ensure the phone is powered up and connected to a DCHP network.
- Pick up the handset and then press *112*113#, the IP address is announced by the phone.
- Open your browser (such as Chrome, Firefox, etc.) and type in the web address of the phone. For example, http://IP.address.of.thePhone:8000

When the Web login front page is displayed. Enter the user name and the password and click **Login**.
The administrator's user name and password are "**admin**" and "**1234**" respectively.

For technical support, please email to support@aeicomunications.com.tw

Model:

SAX-8206-P / SAX-8106-P
