

Analog DECT Phone



ASP-8210-SMK /ASP-8110-SMK

QIG
V 1.00

1 Overview

This phone is a full-feature telephone that provides voice communication. Read this QIG carefully to learn how to operate this product and take advantage of its features.

Package Contents


When unpacking the phone, ensure all the following items are present and undamaged. If anything appears to be missing or broken, contact your dealer for a replacement.

1. Base Unit
2. Cordless Handset
3. Stand
4. Battery
5. AC Adaptor
6. Quick Installation Guide (This document)

2 Product Description

The following contains important information to help you familiarize with the functions of the analog phone.


Front View

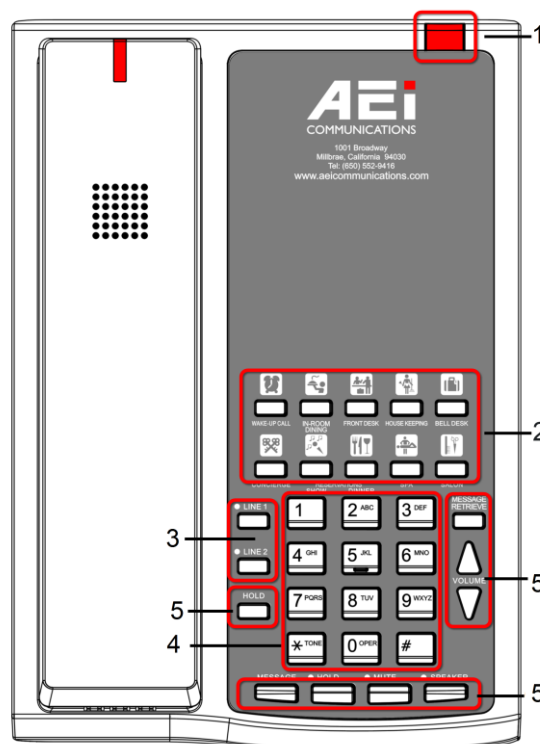

1. Base unit keys

| | Name | Description |
|---|---------------------------|---|
| 1 | Message waiting indicator | To indicate an incoming call or unread messages. |
| 2 | Speed dial keys | Press to dial the preset number. |
| 3 | LINE 1 / LINE 2 | To indicate a line been used as the following status: - Idle: No LED indication. - Pre-dialing a call: Green LED. |


| Name | Description |
|------|--|
| | - In call: Red LED. - In on-hold call: Blinking red LED. |
| 4 | Alphanumerical keys Press these keys to enter phone numbers and texts. |
| 5 | Function keys |
| | HOLD Press to put an active call on hold. |
| | REDIAL Press to call the last number dialed. |
| | CONF Press to activate the three-way conference call. |
| | MUTE Press to mute a call. |
| | SPEAKER Press to activate the speakerphone for hands free conversations. |
| | MESSAGE Press to retrieve voice messages. |
| | VOLUME Press to increase or decrease the volume of the ringer tone or speakerphone. |

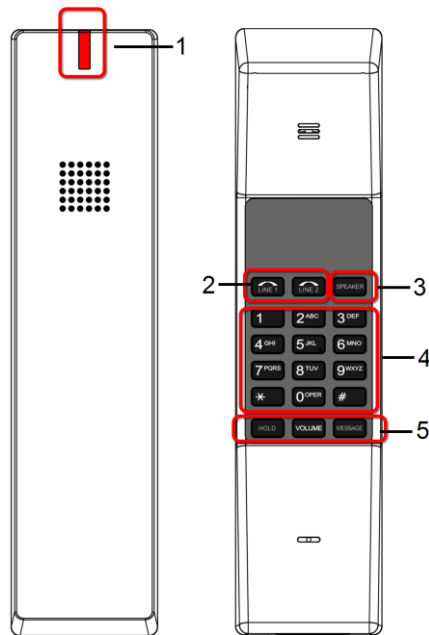

2. Handset keys

| Name | Description |
|------|---|
| 1 | Message waiting indicator To indicate an incoming call or unread messages. |
| 2 | LINE 1 / LINE 2 To indicate a line been used as the following status: - Idle: No LED indication. - In call: Red LED. - In on-hold call: Blinking red LED. |
| 3 | SPEAKER Press to activate the speakerphone for hands free conversations. |
| 4. | Alphanumerical keys Press these keys to enter phone numbers and texts. |
| 5 | Function keys |
| | MESSAGE Press to retrieve voice messages. |
| | HOLD Press to put an active call on hold. |
| | VOLUME Press to increase or decrease the volume of the ringer tone, handset, or speakerphone. |


Back View

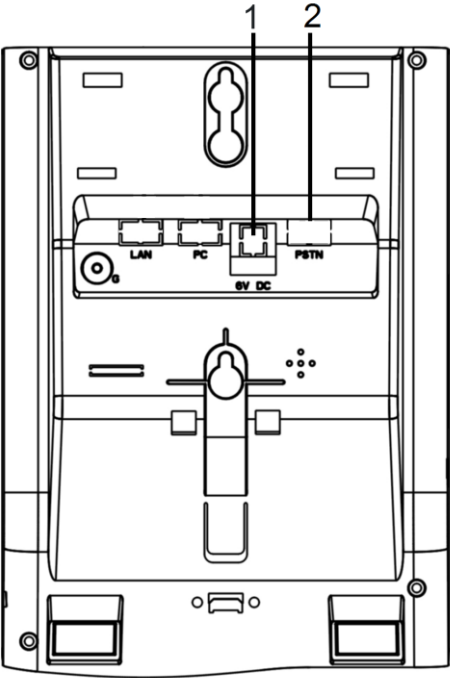


| NO. | Name | Description |
|-----|------------------|-------------------------------|
| 1 | DC 6V Power jack | Connects to AC power adapter. |
| 2 | PSTN line port | Connects to PSTN line. |

Connecting the Phone


The following illustration shows how to connect the power.

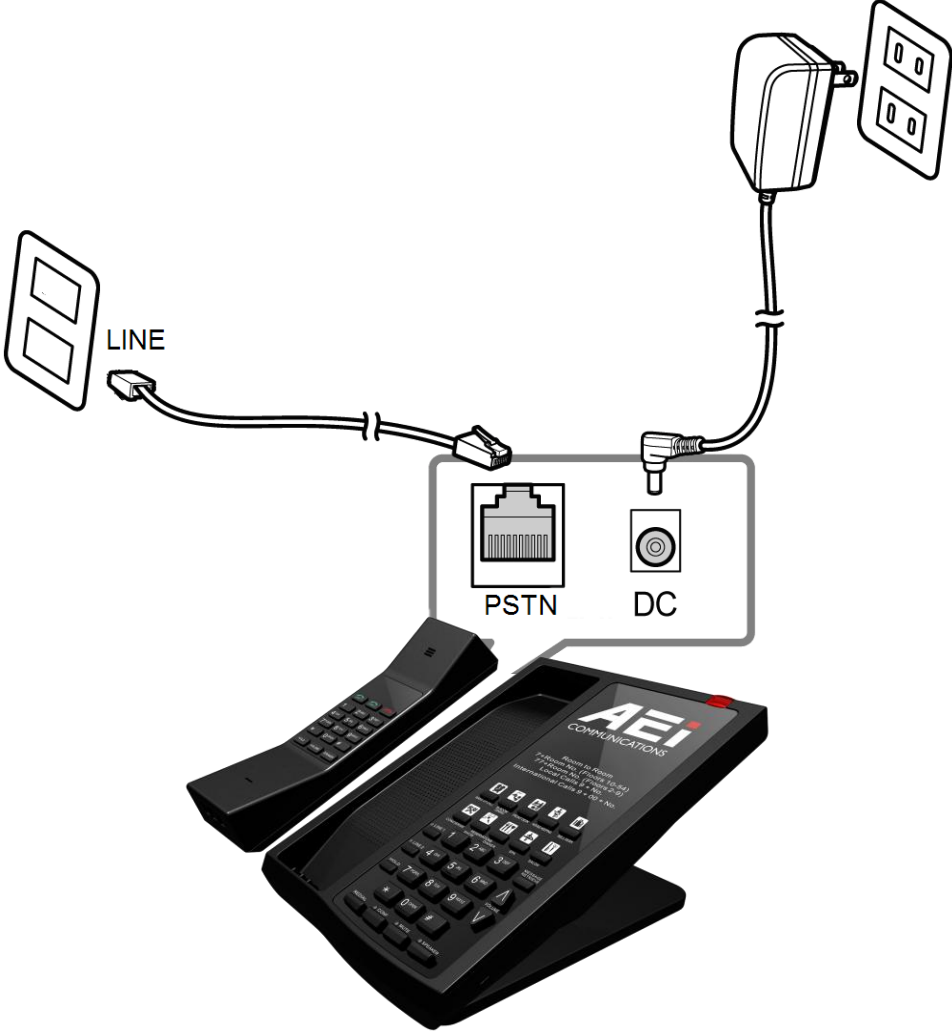

The following illustration shows how to install the phone and stand.

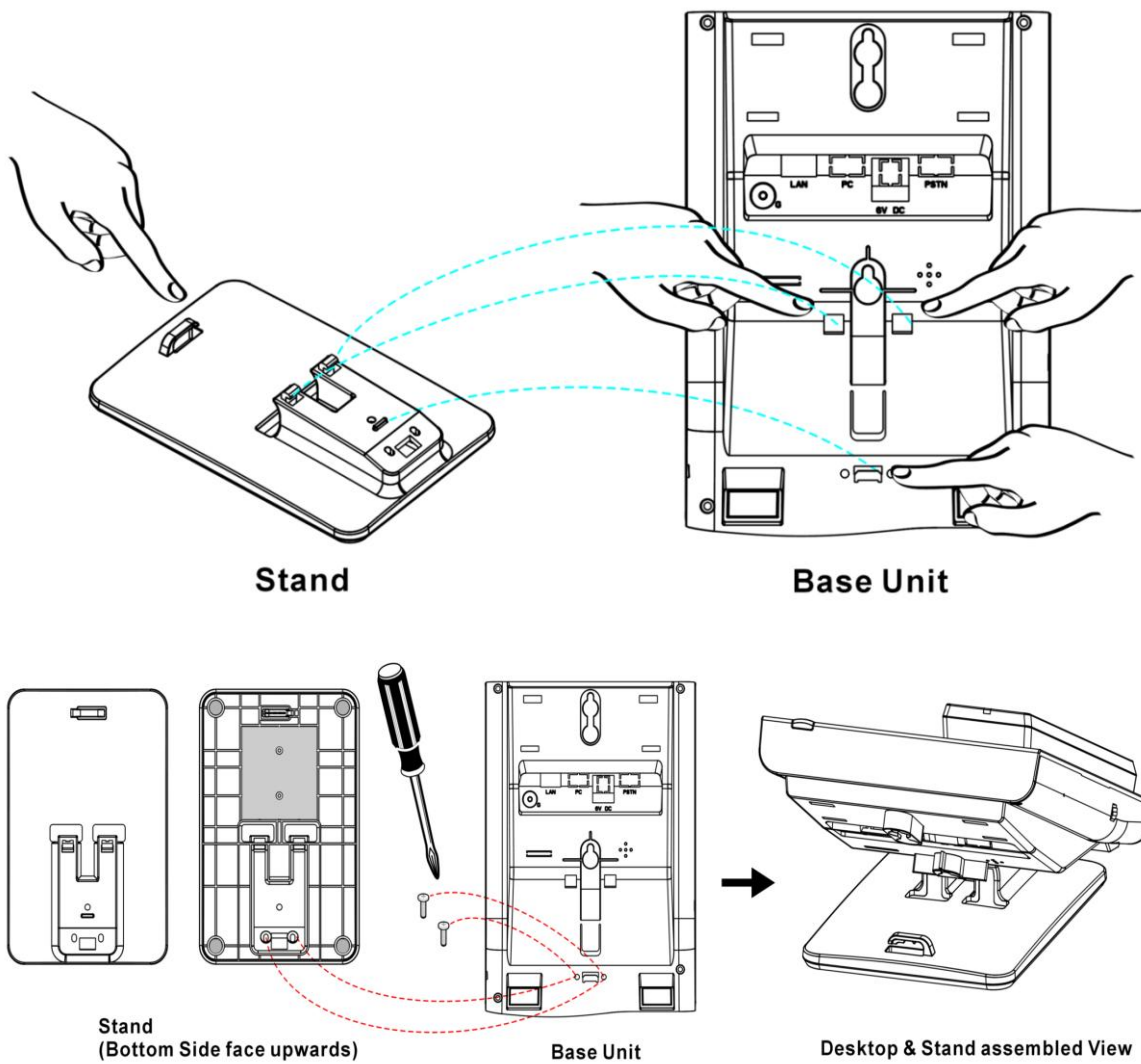

The following illustration shows how to install the handset and battery.

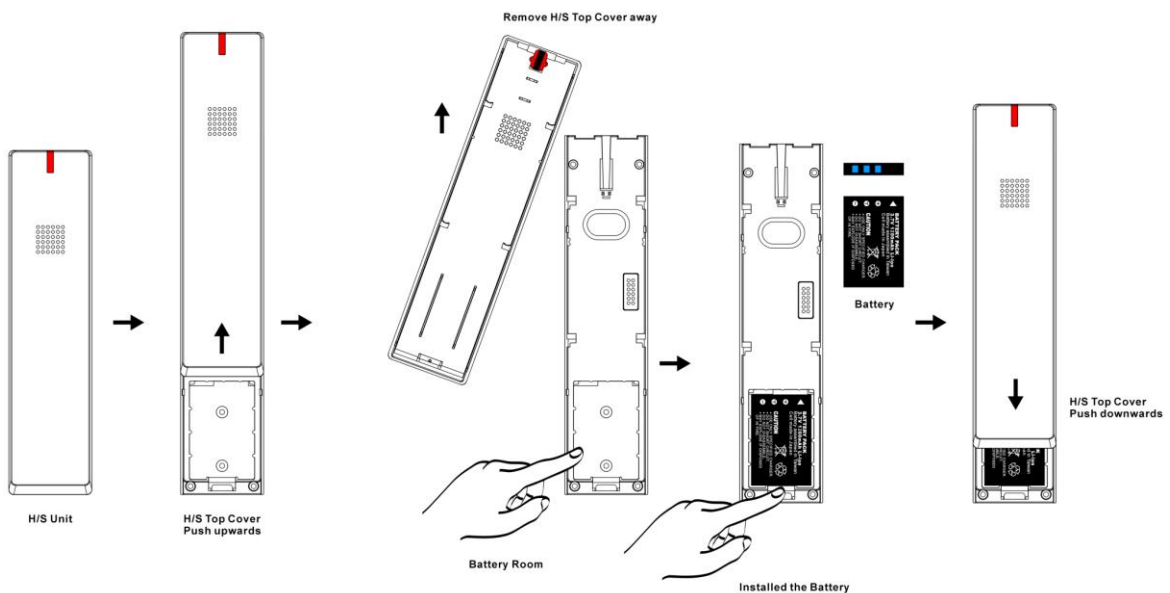

3 Operation

Answering a Call

An incoming call is indicated by a ringing tone and a flashing indicator at the top of both handset and base units. You can answer the call by doing one of the followings:

- Pick up the **handset** to answer the call.
- Press the **Line (Line1/Line2)** key on the base or handset to answer the call.

Making a Call

Dialing with the Keypad

- Enter the telephone number with the alphanumerical keypad.
- After entering the number you want to call, press the # key to force dialing or wait for 4 seconds before the number is dialed automatically.

Using the Speed dial keys

You can use the 10 pre-assigned speed dial hotkeys, to configure the most commonly dialed numbers. Use the function to dial a number quickly, instead of keying in a complete number.

To call a number using speed dialing, follow the steps below:

- Press the speed dial hotkey that has been pre-assigned to the phone number and the call will start automatically.

Call Options

While a call is in progress, a number of additional options are available.

Using the Speaker Phone

For hands free operation, you can use the built-in speaker to talk on the phone. To use the speakerphone, follow the steps below:

- While talking on the phone, press the **SPEAKER** key on the phone to enable the Speakerphone function.
- Press Speaker key again to terminate the call.

Putting a Call on Hold

You may want to put a call on hold temporarily while doing some work or attending to a second incoming or outgoing call. To put a call on hold, do one of the following:

- Press the **HOLD** key on the phone to put the call on hold.
- When you receive a second call, press the next available **LINE** key to attend to the new call, and the first call will be put on hold automatically.

Charging the Handset Battery

You would need to charge the handset battery before using the handset.

- Install the battery into the handset.
- Place the handset onto the base unit and base unit will start to charge the handset automatically.
- The charging indicator lights up in red during charging progress. The LED goes off after the handset battery is fully charged.

Checking Voice Messages

If the **message waiting indicator** at top of handset or base unit lights up in red, it indicates that there are one or more new messages in voicemail box.

- Press the **MESSAGE** key on the phone to retrieve voice messages.

4 Support

For technological support, please email to support@aeicommunication.com.